


Peticionario: **DYNAMOBEL, S.A.**

Fecha de ensayo: 3-may-13

Aislamiento acústico al ruido aéreo según UNE-EN ISO 10140-2:2011

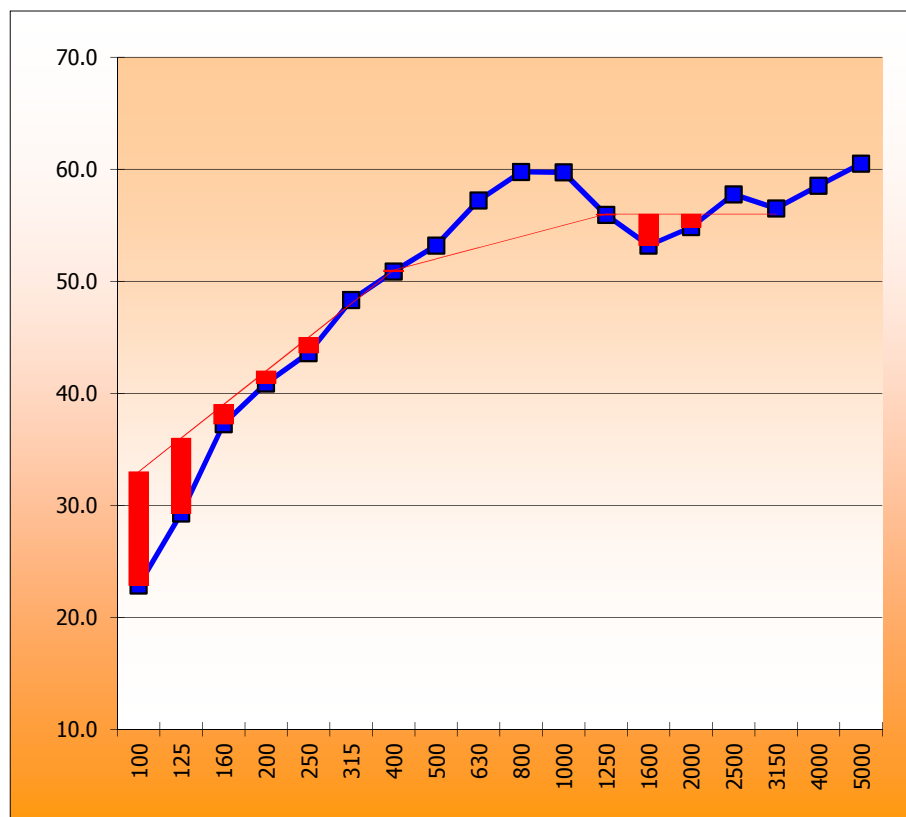


Frecuencia Hz	R
100	22.8
125	29.3
160	37.3
200	40.9
250	43.6
315	48.3
400	50.9
500	53.2
630	57.2
800	59.8
1000	59.7
1250	55.9
1600	53.2
2000	54.8
2500	57.8
3150	56.5
4000	58.5
5000	60.5

Frecuencia Hz	R (Octavas)
125	26.6
250	43.3
500	53.0
1000	58.1
2000	54.9
4000	58.2

Descripción de la muestra:

MAMPARA 1:10 METÁLICA con arranque visto ciega + perforada.

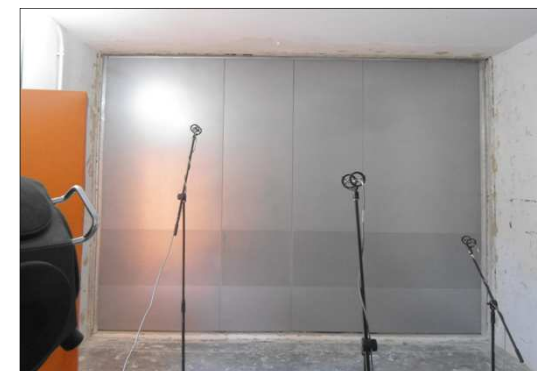

ÍNDICE GLOBAL DE REDUCCIÓN ACÚSTICA, R_w (C ; C_{tr})	52 (-4; -11)	dB
ÍNDICE GLOBAL DE REDUCCIÓN ACÚSTICA PONDERADO A, R_A	49.3	dBA